

Standard Drive

S100



General

Product code	6031002400	
Product description	LSLV0055S100-4EXFNS	
Enclosure Rating	IP66, NEMA 4X (Indoor)	
Input Rating (3-Phase)	Supply Voltage [VAC]	380~480 VAC
	Rated Current [HD/Heavy Duty]	12.9 A
	Rated Current [ND/Normal Duty]	-
	Supply Frequency [Hz]	50~60 Hz
Input Rating (1-Phase)	Supply Voltage (VAC)	480 VAC
	Rated Current (HD)	12.9 A
	Rated Current (ND)	-
	Supply Frequency (Hz)	60 Hz
Output Rating (3-Phase Input)	Output Voltage (VAC)	380~480 VAC
	Motor Power HP (HD)	7.5 hp
	Motor Power HP (ND)	-
	Motor Power kW (HD)	5.5 kW
	Motor Power kW (ND)	-
	Output Current (HD)	12.0 A
	Output Current (ND)	-
	Rated Capacity (HD)	9.1 kVA
	Rated Capacity (ND)	-

	Output Frequency [Hz]	0~400 Hz
Output Rating (1-Phase Input)	Output Voltage [VAC]	-
	Motor Power HP [HD]	3 hp
	Motor Power HP [ND]	-
	Output Current [HD]	7.1 A
	Output Current [ND]	-
	Rated Capacity [HD]	-
	Rated Capacity [ND]	-
	Output Frequency [Hz]	-

General

Short Circuit Rating		100kA (IEC 60439-1)
Overload Capacity	HD	150% for 1min
	ND	-
Control Method		V/F control, Slip compensation, Sensorless vector, PM sensorless
Input Terminals		5 Points
Output Terminals	Relay Output	1 Point
	Open Collector Output	1 Point
EMC Filter		Built-in
DC Reactor		-
Communication	Built-in	Modbus RTU, LS INV 485
	Option	PROFINet, Modbus TCP, EtherCAT, EtherNet/IP, Profibus -DP, CANopen
Option Card		Extension I/O, Remote Cabel, Remote Keypad, Flange, C onduit

Environment



Ambient Temperature	HD	-10~50°C (14~122°F)
	ND	-
Storage Temperature		-20~65°C (-4~149°F)
Humidity		Relative humidity of 95% RH or below (without dew formation)

Vibration	9.8m/sec ² (1.0G) or below
Altitude	1,000m above sea level (From 1,000m or more, voltage/ output current derating by 1% for every 100m elevation; up to 4,000m)
Certification	KC, CE, UL, cUL, Safety

Dimensions

Frame	C	
W x H x D	mm	250 x 328 x 241.2
	inch	9.84 x 12.91 x 9.50

Drawing

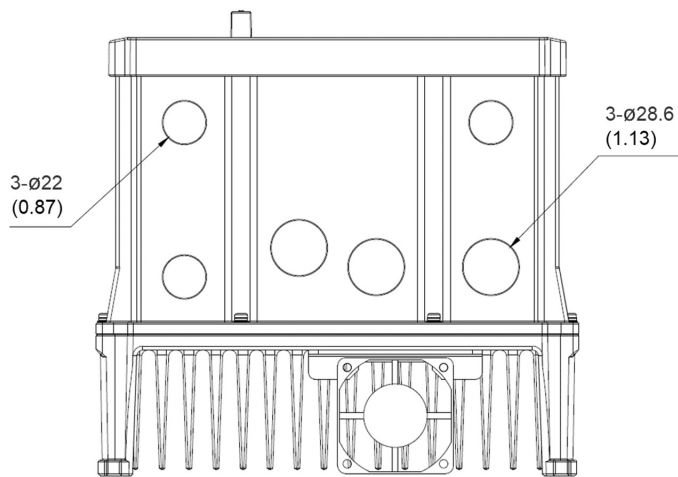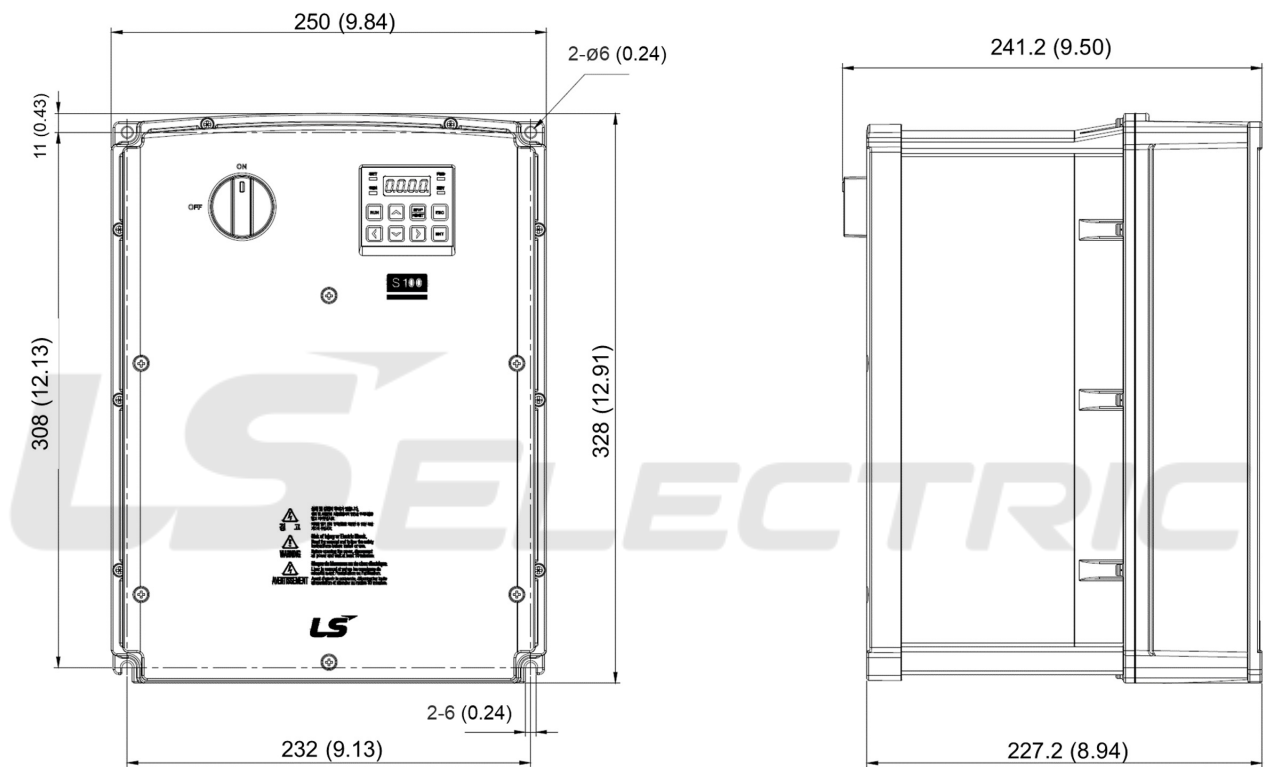

Dimension: mm (inch)